



TERA SCONCE

Installation Guide

We recommend that a professional electrician install our Tera Sconce fixture. Please share this guide with them and ensure they read the instructions completely before beginning assembly.


Tera Sconce parts and pieces

- Fixture
- Backplate Assembly
- Misc. Pieces
 - 2x Wire Nuts
 - 2x Mounting Screws
- E12 Light Bulb



CAUTION: Before starting, turn off power at main circuit power



Tera Sconce Installation

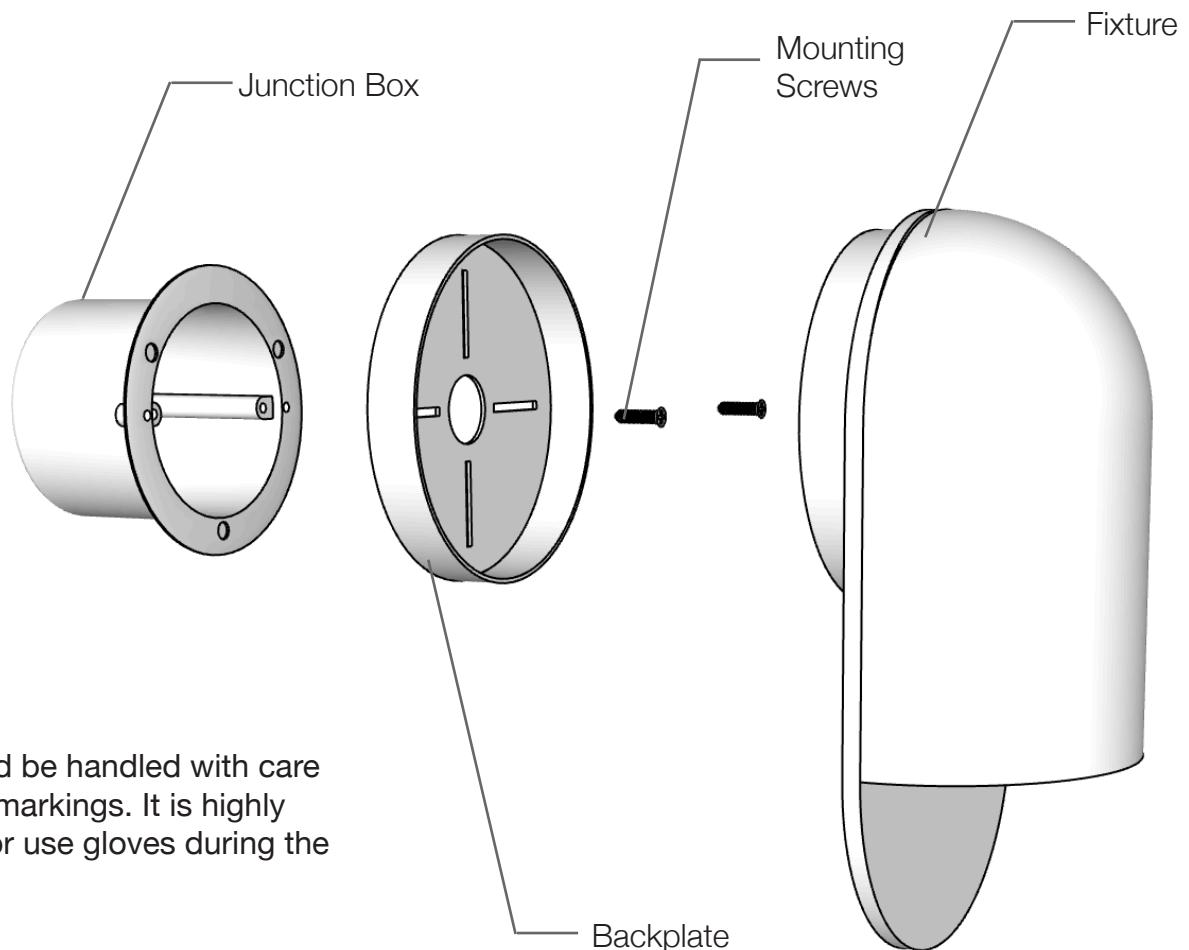

*Your Tera Sconce is handmade and should be handled with care during installation to avoid any staining or markings. It is highly recommended to either wash your hands or use gloves during the installation process.

1. Unscrew the screws holding together the backplate and canopy and remove the small bag containing the mounting screws and wire nuts.
2. Safely set the fixture on a clean and level surface.

Tera Sconce Installation

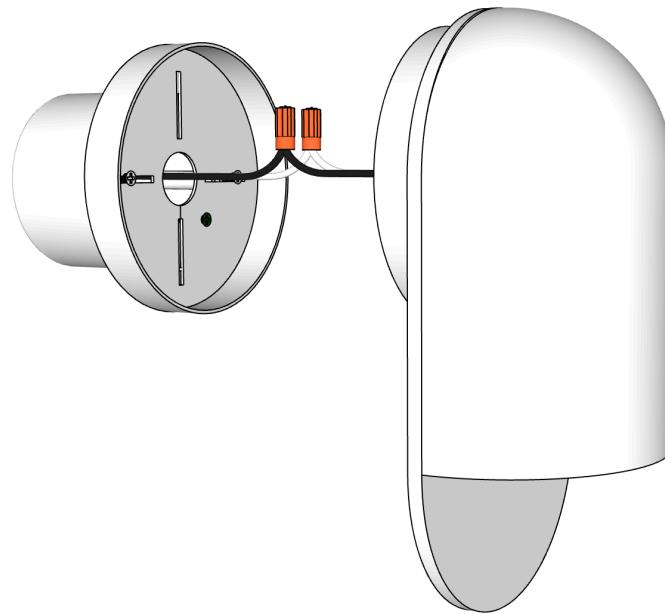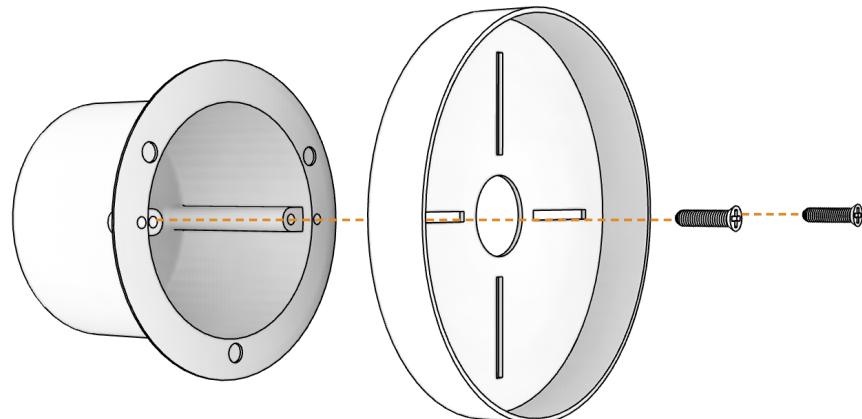

3. Secure the Mounting Bracket to the junction box using the provided Mounting Screws.

4. Connect the grounding wire from the fixture to the grounding screw on the junction box.


5. Connect the wires from the fixture to the wires from the junction box using the wire nuts.

Tera Sconce Installation



6. Slide the fixture over the Mounting Bracket and secure the canopy to the mounting bracket using the supplied screws.

Note: If installing an exterior application, it is necessary to apply a thin bead of exterior-rated silicone to seal the canopy to the mounting surface.

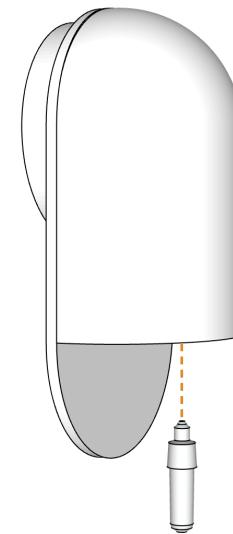

7. Screw the light bulb into the socket
8. Reconnect the power and enjoy!